


K4-16S

Eco Solvent Printer

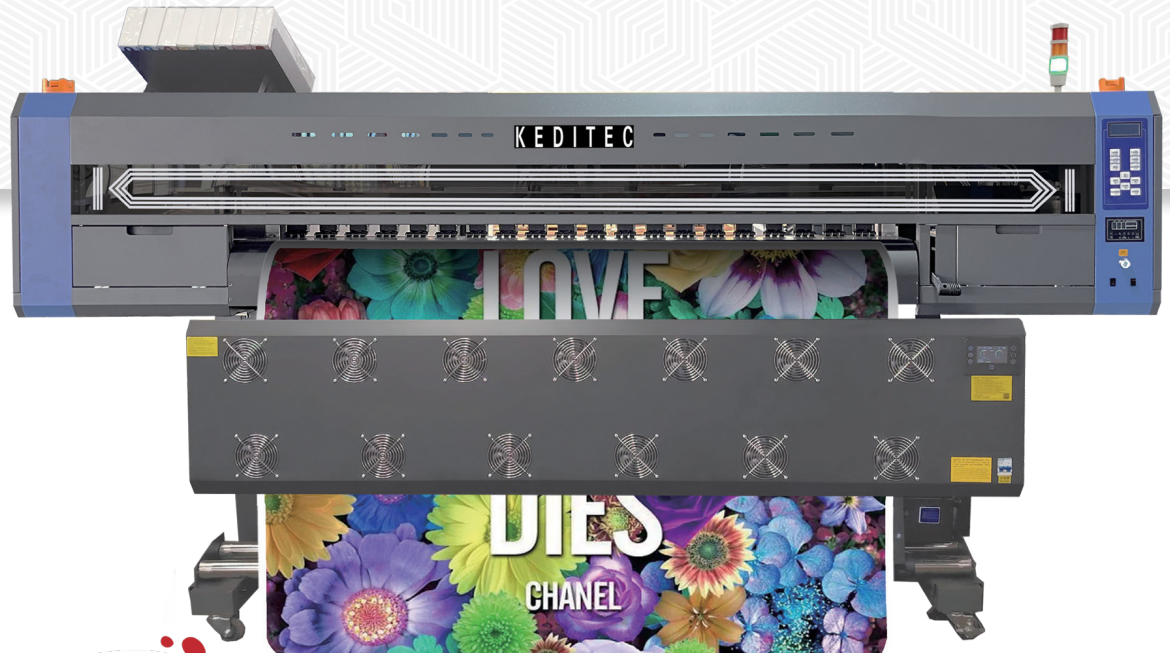


KEDITEC


Main Features



Precision Silent Rail

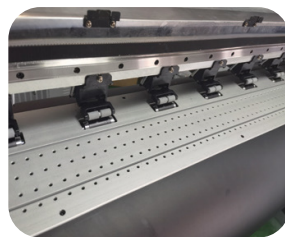


Multi-stage Pinch Roller

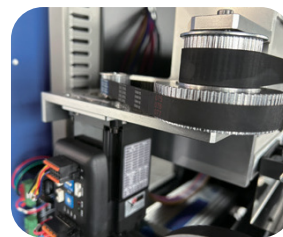

High-Stability Tensioning
Pulley System




High-Stability Tensioning
Pulley System

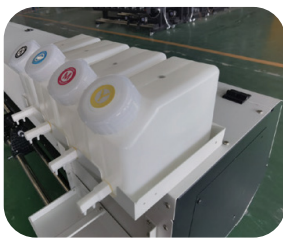


High-Capacity Ink Supply



Advanced Heating
Control

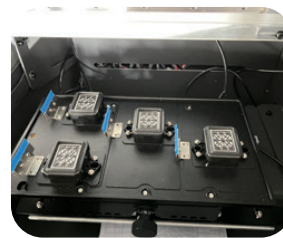

Moisturizing Claning
Assembly



Efficient & Intelligent
Design

K4-16S

Eco Solvent Printer

Technical Specifications

MODEL		K4-16S
Print Head		Four i3200-E1 Print Heads
Printing Technology		Piezoelectric Inkjet
Acceptable Media	Width	63.8 in.(1620 mm)
	Thickness	Maximum 59 mil(1.5 mm)
	Weight	132.2 lb.(60 kg)
Printing Width		63 in.(1600 mm)
Ink Cartridges	Type	Eco Solvent Ink
	Capacity	Continual Ink SupplySystem (1.5L ink tank)
	Colour	CMYK / CMYK+Lc+Lm+Lk+R
Printing Resolution		Maximum 2400 dpi
Printing Speed		4pass(360x2400dpi): 80 m ² /h 6pass(720x1800dpi): 60 m ² /h 8pass(720x2400dpi): 42 m ² /h
Media Heating System		Intergrated Post Heater, Infrared Dryer & Fan System
Interface		Ethernet Interface
Power Supply		AC 220V ± 10%, 50/60 HZ
Dimensions(with stand)		108(W)x31(D)x63(H) in. 2750(W)x800(D)x1500(H) mm
Weight(with stand)		661 lb.(300 kg)
Package Dimensions		110(W)x29.5(D)x34(H) in. 2800(W)x750(D)x880(H) mm
Package Weight		1322lb.(600 kg)
Environment	Power on	Temperature: 59°F to 90°F [15°C to 32°C] / Humidity: 35 to 80% (no condensation)
	Power off	Temperature: 41°F to 104°F [5 °C to 40 °C] / Humidity: 20 to 80% (no condensation)
Accessories		Four i3200 Print Heads, USB Cable, Media Clamp, Manual, Drain Bottle, Ink Cartridges, RIP Software, etc.

Specifications are subject to change without prior notice.

Four i3200-E1 Heads

